
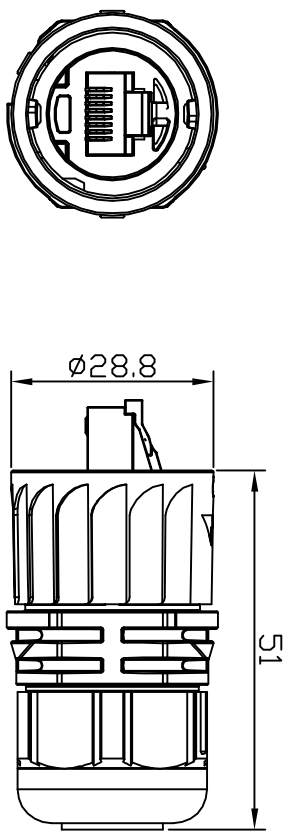


| REV. | ECN NO. | DESCRIPTION | SIGN | DATE |
|------|---------|-------------|------|------|
| | | | | |
| | | | | |
| | | | | |

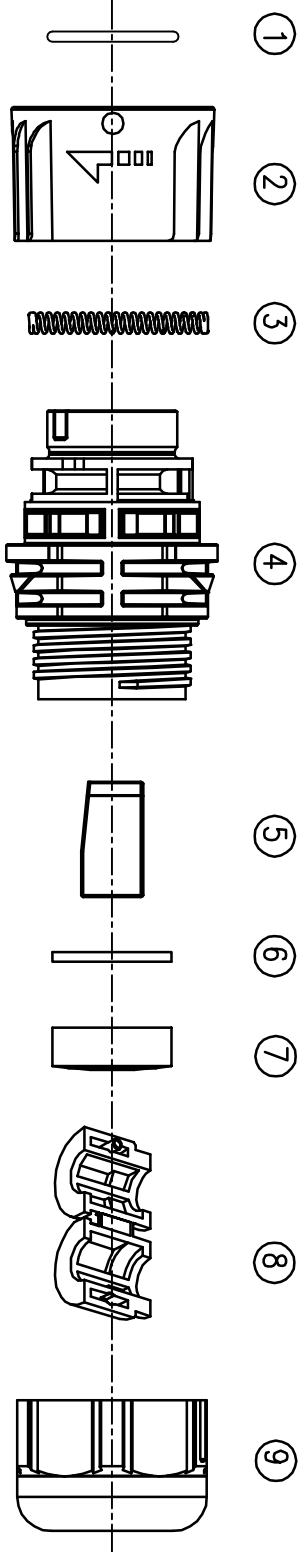

性能参数 Specification:

1. 工作温度 Operation temperature: -45℃ ~ 105℃.
2. 绝缘电阻 Insulation resistance: 100MΩ at DC500V.
3. 接触电阻 Contact resistance: <10mΩ.
4. 防水等级 Waterproof: IP67.
5. 机械寿命 Mating cycles: 500 cycles.

| No. | Material No. | Q'ty | Material Description | Cable Range |
|-----|--------------|------|----------------------------|-------------|
| 9 | 109-00001-00 | 1 | RJ45-快插式压紧螺母 | |
| 8 | 199-00005-00 | 1 | RJ45-快插式耦合器 | |
| 7 | 502-00011-00 | 1 | RJ45-快插式密封环 | |
| 6 | 503-00024-00 | 1 | RJ45-快插垫片 | |
| 5 | 199-00004-00 | 1 | RJ45-快插式型塞 | |
| 4 | 101-00088-00 | 1 | RJ45-快插式公插头 | |
| 3 | 501-00027-00 | 1 | Φ19X1.5-30度O型硅胶圈(红色) | |
| 2 | 406-00003-00 | 1 | Large快插弹簧 Spring | |
| 1 | 107-00022-00 | 1 | Large快速自锁式锁环(蓝色) Screw Nut | |

材 料 表

UNIT:mm

TOLERANCE

SCALE

REV. D1

SIZE A4

SHEET 1 OF 1

Inspection Item

CHOGORI

深圳乔合里科技有限公司

RJ45-快插式公插头

PART NO 33-000000-16

DWG NO

CUSTOMER

DRAWN BY Xu

CHECKED BY

APPROVED BY

DATE 2013-03-14